

Project Name: _____

Fixture Type: _____

Date: _____



ELIUM[™] Commercial Downsizer Ring to 4" Downlights

120-277V, Triac, ELV, 0-10V. Remodel/Retrofit, Round and Square Flangeless options.

4" ELIUM[®] TRIMS



Flangeless Round
Bevel



Flangeless Round
Pinhole



Flangeless Round
Wall Wash



Flangeless Square
Bevel



Flangeless Square
Pinhole



Flangeless Square
Wall Wash

FEATURES	SPECIFICATIONS
- For use in existing 5", 6", 7" and 8" frames. 3 Part System: Downsizer Ring, Module, & Trim. - Lockable gear adjustment up to 40° center axis tilt with 3/32" Allen Key from below the ceiling. - Patented LED Module with in field changeable optics. - Standard Dimming to 1% with 0-10V, Triac and ELV dimmers. Optional 0.1% dimming. - Flangeless options only - Precision single piece die-cast trims. 50,000 hours lifespan L70.	WATTAGE: 6W – 23W
	LUMENS: 750 lm – 2500 lm
	VOLTAGE: 120-277V
	COLOR TEMP: 2700K, 3000K, 3500K, 4000K
	DIMMABLE: 0-10V, Triac, ELV (1%), 0-10V (0.1%), DALI-2 (0.1%), LUTRON ATHENA (0.1%)
	UL LISTED: Damp & Wet location options
	BEAM ANGLE: 15°, 24°, 36°, 50°
	CRI: 95+


4" ELIUM™ 3-PART SYSTEM: DOWNSIZER RING, MODULE & FRAME



Clear and Solite
Lens Options



Flangeless Millwork
Options




LOCKABLE HOT AIMING GEAR ADJUSTMENT FROM BELOW

Adjustability




Hot Aiming from below
the ceiling using
a $\frac{3}{32}$ " Allen Key

Rotation Lock



359° Lockable Rotation
with $\frac{3}{32}$ " Allen Key*

Lockable Gear Adjustment



Easy access for quick
and effortless adjustments
from below the ceiling



* $\frac{3}{32}$ " Allen Key (**LU332ALLEN**) ordered separately

1. Specify downsizer ring part number		DOWNSIZER RING		Example: LU45RD6DSR
ELIUM	SIZE	STYLE	DOWNSIZER RING	
LU				
LU	45 4"	RD Round SQ Square	6DSR	6" Downsizer Ring

1. Specify frame part number		DRIVER		Example: LUCMREMX07	
ELIUM		DRIVER	LUMENS/WATTAGE	OPTIONAL EM	
LUCM					
LUCMREM	Driver	X 120-277V, 0-10V, Triac/ELV (1%)	07 ² 750 lm (6W)	(Blank) No EM	
		ED ¹ EldoLed, 0-10V (0.1%)	10 ² 1000 lm (8W)	E5 25W EM, 90 min	
		AL ¹ EldoLed, DALI-2 (0.1%)	12 ² 1250 lm (11W)		
		LN ¹ Lutron Athena Node (0.1%)	15 ² 1500 lm (14W)		
			20 ³ 2000 lm (19W)		
			25 ³ 2500 lm (23W)		

¹ Special order, extended lead time of 2-10 weeks may apply.

² IC rated for direct contact with insulation, cUL up to 1500 lumens (14W)

³ Non-IC, for use without insulation, or keep insulation 3" away from fixture. 2000 (19W) - 3500 (32W) lumens

2. Specify module part number		MODULE		Example: LUCM3530D-S	
ELIUM	TYPE	COLOR TEMPERATURE	BEAM		
LUCM					
LUCM	35 CREE PRO9 Chip, CRI 95+	27D 2700K	-S 15°		
		30D 3000K	-N 24°		
		35D 3500K	-F 36°		
		40D 4000K	-W 50°		

SECONDARY MODULE OPTICS*			
L45	L57	L51	L49
Black Louver	White Louver	CCT Reducer	Frosted Lens

*Module Fits up to 4 secondary optics

3. Specify trim part number

TRIM

Example: LU45RD10LS72W

ELIUM	SIZE		SHAPE		STYLE		TRIM		LENS		FINISH	
LU												
LU	45	4"	RD	Round	10	Bevel	LS	Flangeless ^{2,3}	(Blank)	Open, No Lens ^{4,6}	W	All White ⁸
			SQ	Square	27	Pinhole			72	Clear Lens ^{5,6}	BB	All Black
					33	Wall Wash ¹			83	Solite Lens ^{5,6}	BZ	All Bronze
									94	Linear Lens ^{5,7}	CC	Custom Color

¹ Requires Linear Lens (94 lens option)

² Works with all ceiling thicknesses (2"+ thick ceilings may limit adjustment).

³ Requires Spackle Frame - ordered separately

⁴ Damp Location

⁵ Wet Location

⁶ Not available for Wall Wash Trim

⁷ For Wall Wash trim only

⁸ White trims are field paintable


HH All Haze

Accessories



ALLEN KEY: LU332ALLEN

PRODUCTS


DOWNSIER RING



ROUND





SQUARE



Remodel/Retrofit




ELIUM Remodel/Retrofit

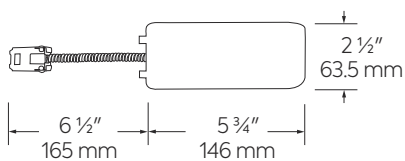


Module



ELIUM Commercial Module



Accessories



Black Louver
L45



White Louver
L57



CCT Reducer
L51




Frosted Lens
L49




Lenses
LUP15D (15°)
LUP24D (24°)
LUP36D (36°)
LUP50D (50°)




Flangeless Round Bevel




Flangeless Round Pinhole



Flangeless Round Wall Wash




Flangeless Square Bevel




Trims



Flangeless Square Pinhole




Flangeless Square Wall Wash



Fire Rated Products and Accessories

1-HOUR FIRE ENCLOSURE FOR RECESSED FIXTURES



FIREENCL Standard – 9" H x 20 3/8" L x 14 3/8" W,
(228.5" mm H x 517.5" mm L x 365" mm)

FIREENCL-S Shallow (-S) – 7 1/4" H x 16" L x 14 3/8" W
(184" mm H x 506.5" mm L x 365" mm W)

Provides fire barrier around recessed lights. ETL approved 1-hour fire rating. Meets UL 263, ASTM E119 Specifications. To be used with Mica Tape to seal the power feeding point. (FIRETAPE sold separately)

MICA ADHESIVE FIRE TAPE FOR FIRE ENCLOSURE



FIRETAPE 3/4" W x 16" L,
(19 mm W x 405.6 mm L)

Fire proof mica adhesive tape helps seal the power feeding point on Fire Enclosure. Offers outstanding high temperature and flame resistance, and provides excellent electrical insulation.

2-HOUR FIRE COVER FOR RECESSED FIXTURES



FIRECVR
9 3/4" H x 17" O.D. x 13" I.D.
(501.5 mm H x 432 mm O.D. x 330 mm I.D.)

Made of heat activated intumescent material. UL approved for most ceiling types: sheetrock drywall, gypsum & acoustical tiles. UL Rated enclosure stops flame spread and heat transmission for up to 2 hours.

TECHNICAL SPECIFICATIONS

OPTICS:

- Polycarbonate module lens diffuses light evenly throughout while reducing glare with LED technology.
- Standard lens is shatterproof.

CONSTRUCTION:

- **LIGHT ENGINE:** Diecast aluminum body with heat fins allow for efficient cooling
- **DOWNSIZER RING:** Made of high quality metal.
- **TRIMS:** Diecast aluminum trims with powder coated finish.

LED TECHNOLOGY:

- Extremely accurate Color Rendering Index of 95+. Lumen Maintenance of 50,000 hours L70.
- Life based on LM80 standardized test results. Superior Thermal Management by utilizing integrated heatsink.
- Instant On to Full Brightness technology. No LED pixilation.

ELECTRICAL:

- Module connects to 120-277V power supply. High efficiency driver with a power factor >0.9. Start time of less than 0.75 seconds.

DIMMING:

- Works with 120-277V input. 120V Triac/ELV type dimmers and 120V or 277V 0-10V dimmers.
- Dims down to 1%. For full list of dimmers, refer to the Dimmer Compatibility list.
- Industry leading dimming that dims smoothly with no hot spots or flickering

LISTINGS:

- RoHS Compliant. Meets Energy Star & California Title 24 JA8-2025-E standards

MODULE - LUMEN MULTIPLIER

CCT	MULTIPLIER	BEAM ANGLE	MULTIPLIER	LENSES	MULTIPLIER
2700K	0.96	15°	0.84	L45 - Black Louver	0.95
3000K	1	24°	0.89	L57 - White Louver	0.96
3500K	1.05	36°	1	L47 - Optic Spread	0.93
4000K	1.085	50°	1.065	L49 - Frosted Lens	0.85
				L51 - CCT Reducer	0.90
				Trim 72 - Clear Lens	0.95
				Trim 83 - Solite Lens	0.87

DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELIUM Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
120V - Triac/ELV Dimmers for LU29RD, LU29SQ, LU37RD, LU37SQ, LU45RD & LU45SQ Series			
Leviton	120V AC 60Hz, 300W Electronic Low Voltage, 400 Volt Amp, Single Pole, 3-Way	IPE04	1% - 100%
	120V AC 60Hz, 300W CFL or 600W Incandescent, 400 Volt Amp, Single Pole, 3-Way	6673-10W	1% - 100%
	120V AC, 600W Incandescent with LED Locator, Single Pole, 3-Way	VP106	1% - 100%
	120V AC 60Hz, 500W Incandescent with LED Level Indicator, Single Pole, 3-Way	6161	1% - 100%
	120V AC, 150W LED/CFL or 600W Incandescent, Single Pole, 3-Way	6674	1% - 100%
Lutron	120V AC, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	RRD-6CL	1% - 100%
	120V AC 60Hz, 150W LED/CFL/Incandescent/Halogen, Single Pole, 3-Way	DVCL-153P	1% - 100%
	120V 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	TGCL-153P	1% - 100%
	120V AC 60Hz, 300W Electronic Low Voltage, 3-Way, Commercial/Residential Application	DVELV-303P	1% - 100%
	120V, 600W Incandescent/Halogen, Single Pole, Residential Indoor Application	TG-600P	1% - 100%
	120V, 1000W Incandescent or 600W Magnetic Low Voltage, Single Pole, 3-Way	CT103P	1% - 100%
	120V AC 60Hz, 600W Electronic Low Voltage, Single Pole/Multi-Location	MAELV600	1% - 100%
	120V AC 60Hz, 500W Electronic Low Voltage, Single Pole/Multi-Location	FAELV500	1% - 100%
	120V AC 60Hz, 600W Incandescent/Halogen, Single Pole, Slide-to-Off Dimmer	S-600P	1% - 100%
	120V AC 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	SCL-153P	1% - 100%
	Caséta® Wireless Dimmer	PD-6WCL	1% - 100%
	120V AC 60Hz, Low Voltage Load Type, 150W Single Pole	DVLV-600P	5% - 100%
	120V AC, 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way, Residential and Commercial Application	DV-603P	1% - 100%
	120V AC, 50/60Hz, 150W LED/CFL, 600W Incandescent/Halogen, Single Pole, 3-Way, Indoor Application	MA-PRO	1% - 100%
	120V AC 60Hz, 150W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	MACL-153M	1% - 100%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross-reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.



DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELIUM Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
120V - Triac/ELV Dimmers for LU29RD, LU29SQ, LU37RD, LU37SQ, LU45RD & LU45SQ Series			
Eaton	120V AC, 300W LED/CFL or 600W Incandescent/MLV/Halogen, Single Pole, 3-Way	TAL06P1-C1	1% - 100%
Cooper	120V AC 60Hz, 300W LED/CFL or 600W Incandescent/Halogen, Single Pole, 3-Way	SLC03P / DAL06P	1% - 100%
	120V AC 60Hz, 300W LED/CFL or 600W Incandescent, Single Pole, 3-Way, Residential	DLC03P	1% - 100%
	120V AC 60Hz, 600W Incandescent/Halogen, Single Pole, 3-Way	RI061-VW-K2	1% - 100%
	120V AC 60Hz, 300W LED/CFL/ Incandescent/Halogen, Single Pole, 3-Way	AAL06A-C2	1% - 100%
Lightolier	120V, 260W Incandescent/Halogen, Single Pole, 3-Way	ZP260QEW	1% - 100%
0-10V Type Dimmers - 120/277V for LU29RD, LU29SQ, LU37RD, LU37SQ, LU45RD & LU45SQ Series			
Lutron	120/277V AC, 0-10V LED/CFL Ballast, Single Pole, 3-Way	NFTV	1% - 100%
	120/277V AC, 0-10V, Single Pole, 3-Way, Commercial and Residential, Indoor Application	DVSTV	1% - 100%
	120/277V AC 50/60Hz, 0-10V LED/CFL Ballast, Single Pole, 3-Way, Indoor Application	DVTV	1% - 100%
Leviton	120/277V AC 60Hz, 0-10V LED/CFL Ballast, Single Pole, 3-Way	IP710-DL	1% - 100%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross-reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.

